




LED's and design world




İLK BAHAR DECOR


PL051				
↔	5 м	//	м	
↑↓	1 м	//	м	
☒	18 кг	//	кг	
⚡	97 Вт	//	Вт	
LED				

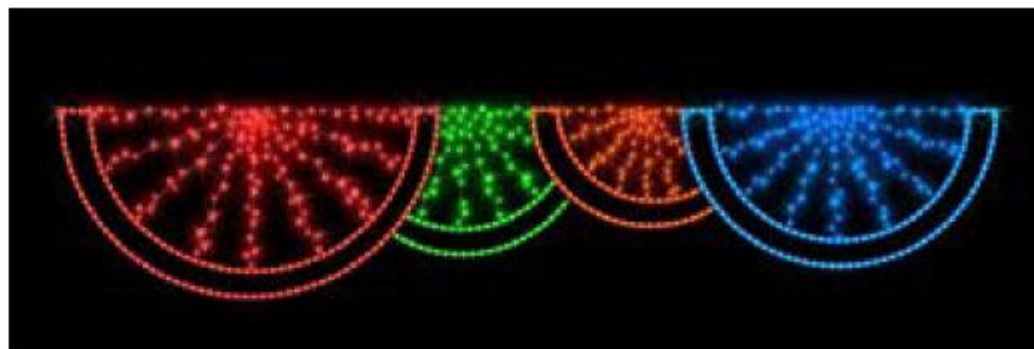

PL052				
↔	4 м	//	м	
↑↓	1.3 м	//	м	
☒	14 кг	//	кг	
⚡	95 Вт	//	Вт	
LED				

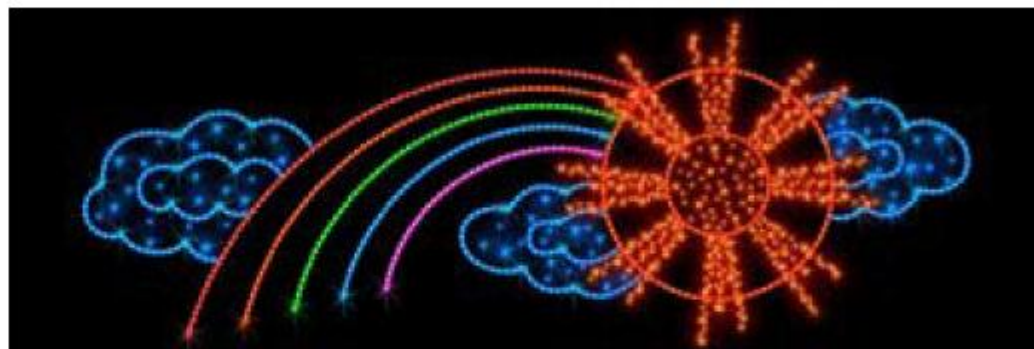

PL053				
↔	4 м	//	м	
↑↓	1.7 м	//	м	
☒	24 кг	//	кг	
⚡	165 Вт	//	Вт	
LED				

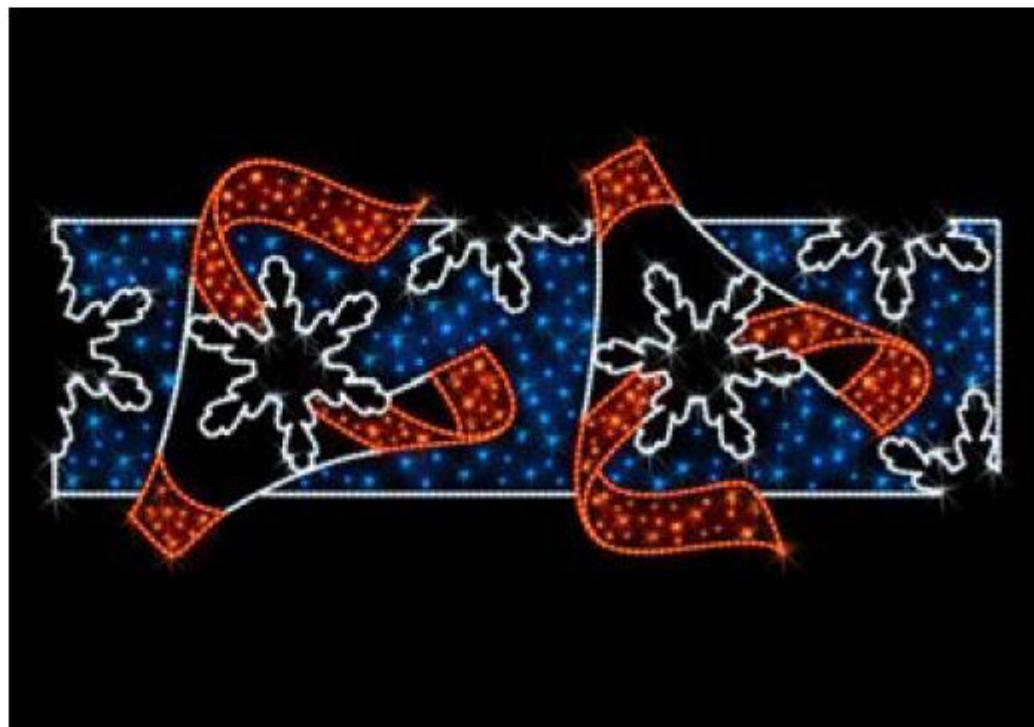

PSL037

↔	10 м	//	м
↑	1.1 м	//	м
☒	40 кг	//	кг
⚡	327 Вт	//	Вт

LED



PL005V1

↔	5.3 м	//	м
↑	1.3 м	//	м
☒	21 кг	//	кг
⚡	186 Вт	//	Вт

LED



PL005V1

↔	5 м	//	м
↑	1.1 м	//	м
☒	9 кг	//	кг
⚡	78 Вт	//	Вт

LED



PL005V1

↔	5 м	//	м
↑	1.1 м	//	м
☒	12 кг	//	кг
⚡	88 Вт	//	Вт

LED



PL010V1

↔	4 м	//	м
↑	0.9 м	//	м
☒	9 кг	//	кг
⚡	71 Вт	//	Вт

LED



г. Владимир, 2005 г.



PL024V1

→	5 м	//	м
↓	1 м	//	м
☐	14 кг	//	кг
⚡	99 Вт	//	Вт
	LED		



PL026V1

→	5 м	//	м
↓	0,9 м	//	м
☐	12 кг	//	кг
⚡	81 Вт	//	Вт
	LED		



PL035V1

→	3 м	//	м
↓	0,7 м	//	м
☐	4 кг	//	кг
⚡	41 Вт	//	Вт
	LED		



PL037V1

→	5 м	//	м
↓	0,9 м	//	м
☐	15 кг	//	кг
⚡	79 Вт	//	Вт
	LED		

PL038V1

→	4 м	//	м
↓	1,2 м	//	м
☐	14 кг	//	кг
⚡	98 Вт	//	Вт
	LED		



PL039V1

→	5 м	//	м
↓	1 м	//	м
☐	19 кг	//	кг
⚡	155 Вт	//	Вт
	LED		



PL040

→	5 м	//	м
↓	1 м	//	м
☐	14 кг	//	кг
⚡	105 Вт	//	Вт
	LED		



PL043

→	4 м	//	м
↓	1,3 м	//	м
☐	10 кг	//	кг
⚡	63 Вт	//	Вт
	LED		




PL082

↔	3.8 м	//	м
↓	1.2 м	//	м
☒	10 кг	//	кг
⚡	77 Вт	//	Вт

LED

PSL026

↔	6.5 м	//	м
↓	1.1 м	//	м
☒	24 кг	//	кг
⚡	213 Вт	//	Вт

LED


PL084

↔	6 м	//	м
↓	0.85 м	//	м
☒	16 кг	//	кг
⚡	135 Вт	//	Вт

LED

PSL027

↔	10 м	//	м
↓	1 м	//	м
☒	50 кг	//	кг
⚡	385 Вт	//	Вт

LED


PL085

↔	6 м	//	м
↓	0.85 м	//	м
☒	16 кг	//	кг
⚡	138 Вт	//	Вт

LED

PSL028

↔	10 м	//	м
↓	1.9 м	//	м
☒	29 кг	//	кг
⚡	174 Вт	//	Вт

LED


PL086

↔	5.4 м	//	м
↓	0.7 м	//	м
☒	13 кг	//	кг
⚡	101 Вт	//	Вт

LED

PSL029

↔	7 м	//	м
↓	1.1 м	//	м
☒	30 кг	//	кг
⚡	194 Вт	//	Вт

LED





PSL051

↔	7.5 м	//	м
↓	1.3 м	//	м
✉	26 кг	//	kg
⚡	183 Вт	//	W
LED			





KL069					KL070V1					KL071V1					KL074V1				
→	1.3 м	//	м	→	1 м	//	м	→	1 м	//	м	→	1 м	//	м	→	1 м	//	м
↓	2.5 м	//	м	↓	2.5 м	//	м	↓	2.5 м	//	м	↓	2.5 м	//	м	↓	2.5 м	//	м
☒	7 кг	//	кг	☒	9 кг	//	кг	☒	10 кг	//	кг	☒	6 кг	//	кг	☒	6 кг	//	кг
↗	50 Вт	//	Вт	↗	71 Вт	//	Вт	↗	83 Вт	//	Вт	↗	51 Вт	//	Вт	↗	51 Вт	//	Вт
LED					LED					LED					LED				



KL078V1				KL080			
↔	0.9 м	//	м	↔	1.2 м	//	м
↓	2.5 м	//	м	↓	2.5 м	//	м
☒	6 кг	//	кг	☒	9 кг	//	кг
↗	47 Вт	//	Вт	↗	61 Вт	//	Вт
LED				LED			

KL097V2				
→	1.1 м	//	м	→
↓	2.5 м	//	м	↓
☒	5 кг	//	кг	☒
↗	42 Вт	//	Вт	↗
LED				



KL098					KL098V1						
→	1.1 м	//	м	→	1.1 м	//	м	→	1.1 м	//	м
↓	2.5 м	//	м	↓	2.5 м	//	м	↓	2.5 м	//	м
☒	8 кг	//	кг	☒	8 кг	//	кг	☒	8 кг	//	кг
↗	59 Вт	//	Вт	↗	59 Вт	//	Вт	↗	59 Вт	//	Вт
LED					LED						



Пример



KL145				
→	2,1 м	//	м	
↓	0,9 м	//	м	
□	9 Вт	//	кг	
⊕	65 Вт	//	В	
LED				



KL149				
→	1,12 м	//	м	
↓	2,49 м	//	м	
□	10 Вт	//	кг	
⊕	73 Вт	//	В	
LED				

KL150				
→	0,94 м	//	м	
↓	2,5 м	//	м	
□	11 Вт	//	кг	
⊕	89 Вт	//	В	
LED				



KL154				
→	0,76 м	//	м	
↓	2 м	//	м	
□	12 Вт	//	кг	
⊕	92 Вт	//	В	
LED				




KL155				
→	1,6 м	//	м	
↓	4 м	//	м	
□	32 Вт	//	кг	
⊕	252 Вт	//	В	
LED				



KL156				
→	0,75 м	//	м	
↓	1,4 м	//	м	
□	3 Вт	//	кг	
⊕	24 Вт	//	В	
LED				



KL157				
→	1,1 м	//	м	
↓	2,5 м	//	м	
□	5 Вт	//	кг	
⊕	45 Вт	//	В	
LED				





KL158				
→	1,45 м	//	м	
↓	2,1 м	//	м	
□	7 Вт	//	кг	
⊕	46 Вт	//	В	
LED				



OL071				OL071V1				OL071V2				SL034			
↔	0.9 м	//	м	↔	0.4 м	//	м	↔	0.4 м	//	м	↔	0.35 м	//	м
↓	0.9 м	//	м	↓	0.4 м	//	м	↓	0.4 м	//	м	↓	0.38 м	//	м
☒	2 кг	//	кг	☒	1 кг	//	кг	☒	1 кг	//	кг	☒	0.6 кг	//	кг
↗	15 Вт	//	Вт	↗	6 Вт	//	Вт	↗	9 Вт	//	Вт	↗	6 Вт	//	Вт
LED				LED				LED				LED			



OL056				OL069				OL069V1				OL070			
↔	0.3 м	//	м	↔	0.45 м	//	м	↔	0.45 м	//	м	↔	0.3 м	//	м
↓	0.5 м	//	м	↓	0.4 м	//	м	↓	0.4 м	//	м	↓	0.3 м	//	м
☒	1 кг	//	кг	☒	1 кг	//	кг	☒	1 кг	//	кг	☒	1 кг	//	кг
↗	9 Вт	//	Вт	↗	6 Вт	//	Вт	↗	9 Вт	//	Вт	↗	6 Вт	//	Вт
LED				LED				LED				LED			

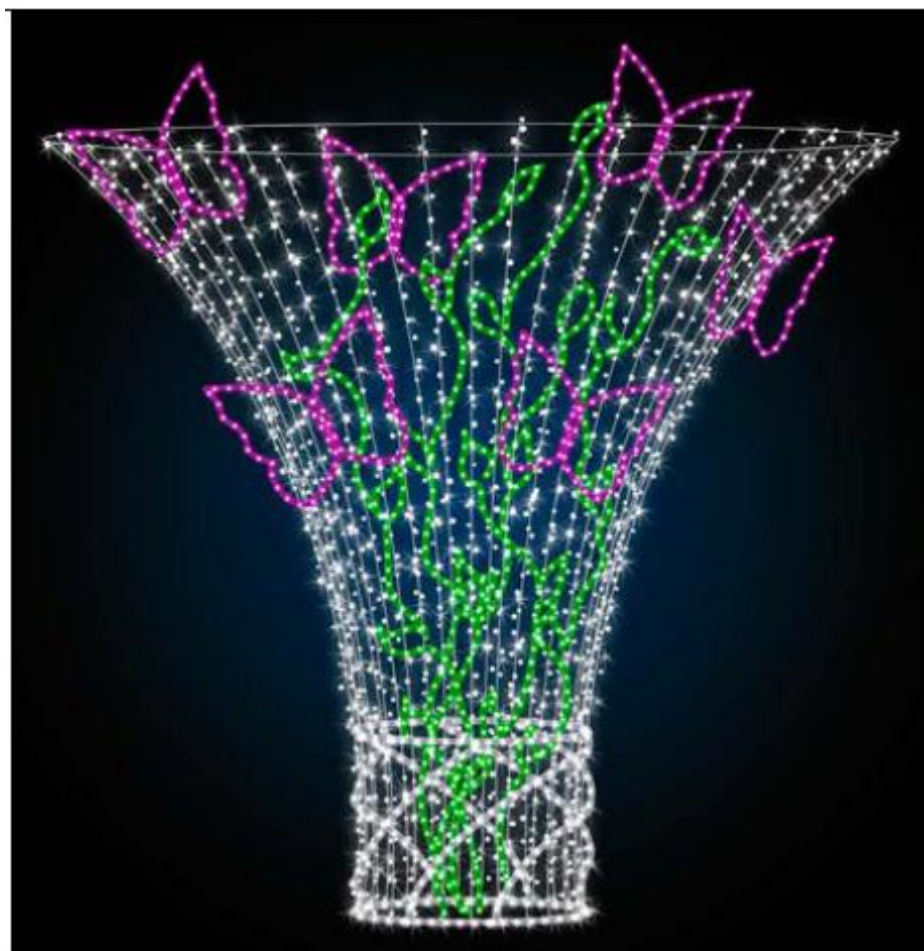

OL033				OL033V1				OL034				OL049			
no zapasy // on request				no zapasy // on request				no zapasy // on request				no zapasy // on request			
LED				LED				LED				LED			



OL057				OL063				OL068			
no zapasy // on request				↔	0.72 м	//	м	↔	0.9 м	//	м
LED				↓	0.72 м	//	м	↓	0.85 м	//	м
				☒	4 кг	//	кг	☒	4 кг	//	кг
				↗	29 Вт	//	Вт	↗	33 Вт	//	Вт
				LED				LED			




3D021			
→	0.9 м	//	м
↓	0.7 м	//	м
⚡	0.2 м	//	м
⏰	3 кг	//	кг
⚡	23 Вт	//	Вт
LED			

3D022			
→	1.1 м	//	м
↓	0.7 м	//	м
⚡	0 м	//	м
⏰	4 кг	//	кг
⚡	29 Вт	//	Вт
LED			



OL153			
→	3.5 м	//	м
↓	0.75 м	//	м
⏰	7 кг	//	кг
⚡	49 Вт	//	Вт
LED			

OL154			
no supply // on request			
LED			



OL155			
→	1.1 м	//	м
↓	0.82 м	//	м
⏰	3 кг	//	кг
⚡	27 Вт	//	Вт
LED			


OL156			
→	0.75 м	//	м
↓	0.8 м	//	м
⏰	2 кг	//	кг
⚡	21 Вт	//	Вт
LED			



г. Днепрпетровск,
2012 г.



Example of a standard street crossing with $\varnothing$ 4 mm cable

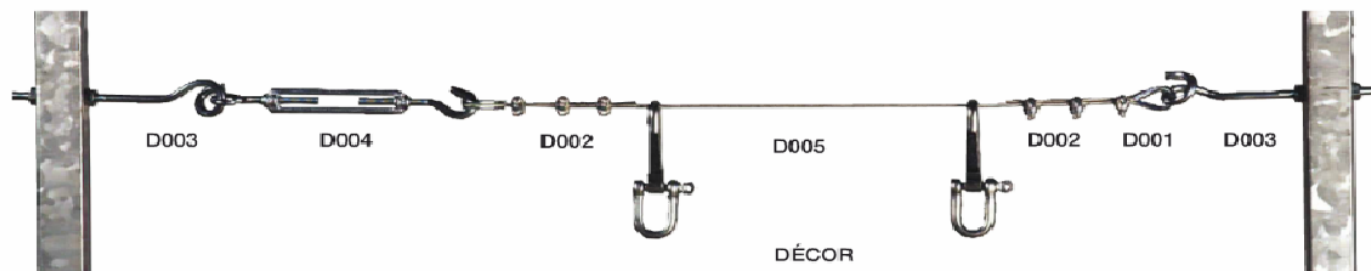

D001 Core grip $\varnothing$ = 4 mm - set of 10

D011 Core grip $\varnothing$ = 6 mm - set of 10

D002 Cable clamp $\varnothing$ = 4 mm - set of 10

D012 Cable clamp $\varnothing$ = 6 mm - set of 10

D003 SM fastening hook L: 16 cm - per pair

D013 LM fastening hook L: 30 cm - per pair

D004 Duplex tensioner at $\varnothing$ 30 mm

D005 Cable $\varnothing$ = 4 mm - roll of 100 m

D015 PVC cable sheath $\varnothing$ = 4 mm - roll of 100 m



D006 Cable $\varnothing$ = 6 mm - roll of 100 m

D016 PVC cable sheath $\varnothing$ = 6 mm - roll of 100 m


D017 Rapid fastener for $\varnothing$ 4 mm (unsheathed) steel cable

D018 Rapid fastener for $\varnothing$ 6 mm (unsheathed) steel cable

Example of a street crossing in insulated glass fibre

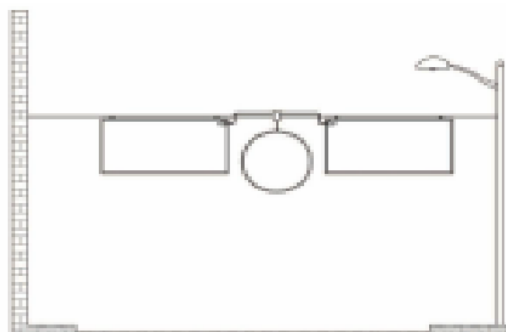

Horizontal bracket

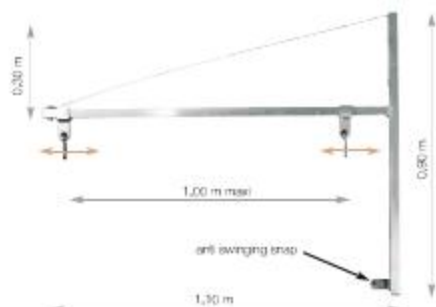

Ref: PIX01
H:0,80 m - L: 1,10 m - inter distance max: 1,00 m - max load: 25 kg



Circular bracket



Ref: P002
ØC on for 60-Ø<200 mm max
Ref: P003
Ø130 on for 50-Ø<200 mm max
Ref: P004
Ø25 on for 60-Ø<120 mm max



Bracket to enclose around poles for simple and creative decorations with led curtain ranges.




example for use



Ref: BT04



Fast connector
The BT04 is connected to each of the two power supplies of the candlebrass (FY05-W - FY05-H) in order to be adapted to all electrical configurations.

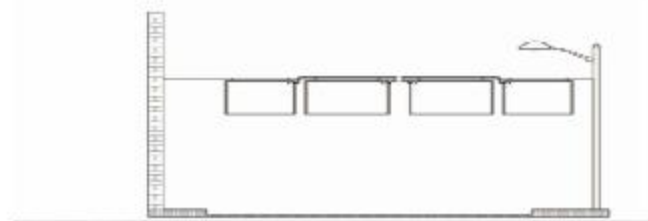

Fixing

D008
Stainless steel drop / ender 10mm
10mm x 0,7mm



Ref: D007
Accessories for stopping
MINIUCO DEX and 15
accessories.

D009
Styple-clip
for steel strip of 10mm






Ref: M/010
Suspension of decoration with
electric cable regulated.

Anti firing




Ref: P1002 (per pair)
Fastener for cross-mount
pole-mounted decorations.



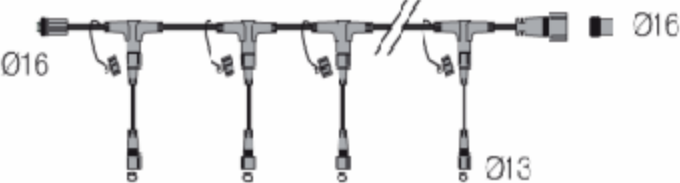accessories for façades, tall structures, buildings, monuments, shopping centres, etc...			black cable	white cable	green cable
	Ø16	Power supply Ø16 - L: 1,50 m - 230V		FY01A-B	FY01A
	Ø16	Connector extension lead Ø16 - L: 2 m - 230V		FY01B-B	FY01B
	Ø16	Connector extension lead Ø16 - L: 2 m - 230V	FY010C	FY010C-B	
	Ø13	Set of 5 end caps for Sparklight® garlands		FY01C-B	FY01C
	Ø16	HO5RN-F connector equipped with 6 connectors - L : 1,00 m supplied with 6 Led Sparklight® adaptors		FY021-B	FY021
		HO5RN-F connector equipped with 12 connectors - L : 2,00 m supplied with 12 Led Sparklight® adaptors		FY022-B	FY022
	Ø13	Y connector Ø13 for Led Sparklight®			FY030
	Ø13	Triple connector Ø13 for Led Sparklight®		FY031-B	FY031



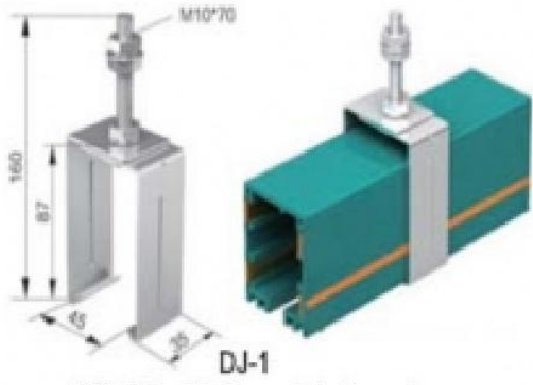

DJ-1
M10 Sürgülu Kayar Askı Aparatı



ADRES :KAYNARCA MAHALLESİ AYDINLI YOLU CADDESİ
MAVİ KULE REZİDENCE NO:137/72 KAT 15
TELEFON:(0216) 483 20 80
FAX : (0216) 483 20 80
CEP : (0507) 484 89 04
WEP : www.algi-reklam.com
mail : info@algı-reklam.com -onur_aytas@hotmail.com